



Fusion 3C

Cena brutto	23 711,94 zł
-------------	---------------------

Cena netto	19 278,00 zł
------------	---------------------

Dostępność	Dostępny
------------	-----------------

Czas wysyłki	24 godziny
--------------	-------------------

Numer katalogowy	123.866
------------------	----------------

Producent	Leister
-----------	----------------

Opis produktu

Dzięki krótkiej, zwartej konstrukcji zagwarantowana jest łatwa obsługa. Wszechstronne zastosowanie dzięki obrotowemu butowi spawalniczemu (360°), przede wszystkim w budownictwie ziemnym. Podgrzewanie masy tworzywa następuje przy użyciu powietrza, którego temperatura regulowana jest za pomocą potencjometru.

Dane techniczne:

Napięcie: 230V

Moc: 2800W

Częstotliwość: 50 HZ

Przepływ powietrza (20 s. C) ok. 350 l/m

Wydajność zgrzewania (HDPE) 1,6 - 3,5 kg/h

Domieszka zgrzewająca: PE, PP

Grubość ścianki: 8 - 25 mm

Folie: >1 mm

Spoivo: Ø 3 i 4 mm

Waga: 6,9 kg

Długość: 588 mm

LEISTER

The suitable welding shoe for every application

FUSION 2/3/3C/WELDPLAST S2



Seam geometries



Fillet weld seam



V-seam / X-seam



Overlap seam



Corner outside seam



Corner seam



Leister Integrated Air System (IA): The air guidance is integrated into the welding shoe. This enables the turning of the shoe 360° into every desired welding and seam position.


 K-5/6 IA Fillet weld, 5/6 mm Article No.: 145.943	 K-8/10 IA Fillet weld, 8/10 mm Article No.: 145.944	 K-15 IA Fillet weld, 15 mm Article No.: 145.812	 K-20 IA Fillet weld, 20 mm Article No.: 145.940	 K-25 IA Fillet weld, 25 mm Article No.: 145.816
 K-30 IA Fillet weld, 30 mm Article No.: 145.817	 V-5/6 IA V-seam, 5/6 mm Article No.: 145.912	 V-8/10 IA V-seam, 8/10 mm Article No.: 145.915	 V-12 IA V-seam, 12 mm Article No.: 145.907	 V-15 IA V-seam, 15 mm Article No.: 145.903
 UBL-25 IA Overlap seam, 25 mm Article No.: 145.896	 UBL-30 IA Overlap seam, 30 mm Article No.: 145.947	 UBL-35 IA Overlap seam, 35 mm Article No.: 145.897	 V-20 IA V-seam, 20 mm Article No.: 145.909	 V-25 IA V-seam, 25 mm Article No.: 145.916
 V-30 IA V-seam, 30 mm Article No.: 145.905	 CO-8 IA Corner outside, 8 mm Article No.: 146.643	 CO-10 IA Corner outside, 10 mm Article No.: 146.645	 CO-12 IA Corner outside, 12 mm Article No.: 146.649	 CO-15 IA Corner outside, 15 mm Article No.: 146.651
 CL-14 IA Corner seam, 14 mm Article No.: 145.811	 CS-20 IA Corner seam, 20 mm Article No.: 145.488	 45° Angled adapter WP S2 Article No.: 139.460	 90° Angled adapter WP S2 Article No.: 139.461	 Welding rod de-roller for 1 roll Article No.: 144.095
		 Pre-heat reflector Article No.: 136.231		

Leister Technologies AG

Switzerland / www.leister.com

Wydajność Extruderów LEISTER

kg/h

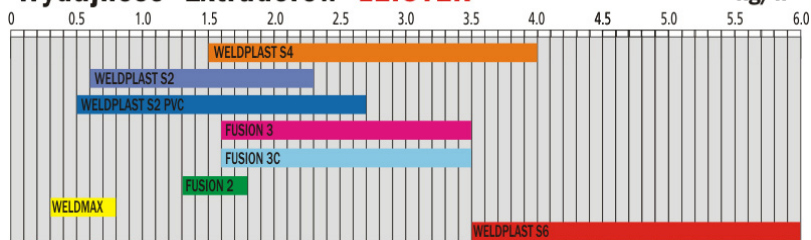

Wydajność zależy od zastosowanego tworzywa!